DC COMPONENTS CO., LTD.

RECTIFIER SPECIALISTS

SF161 THRU SF166

TECHNICAL SPECIFICATIONS OF SUPER FAST RECTIFIER

VOLTAGE RANGE - 50 to 400 Volts *CURRENT - 16 Amperes*

FEATURES

* Low switching noise
* Low forward voltage drop
* Low thermal resistance
* High current capability
* Super fast switching speed
* High reliability
* Good for switching mode circuit

MECHANICAL DATA

* Case: Molded plastic
* Epoxy: UL 94V-0 rate flame retardant
* Lead: MIL-STD-202E, Method 208 guaranteed
* Mounting position: Any
* Weight: 2.24 grams



TO-220

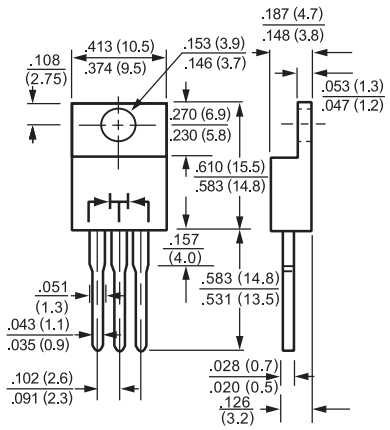

Dimensions in inches and (millimeters)

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25 °C ambient temperature unless otherwise specified.
Single phase, half wave, 60 Hz, resistive or inductive load.
For capacitive load, derate current by 20%.

		SYMBOL	SF161	SF162	SF163	SF164	SF165	SF166	UNITS
Maximum Recurrent Peak Reverse Voltage		V_{RRM}	50	100	150	200	300	400	Volts
Maximum RMS Voltage		V_{RMS}	35	70	105	140	210	280	Volts
Maximum DC Blocking Voltage		V_{DC}	50	100	150	200	300	400	Volts
Maximum Average Forward Rectified Current at T_C = 125°C		I_O	16						Amps
Peak Forward Surge Current 8.3 ms single half sine-wave superimposed on rated load (JEDEC Method)		I_{FSM}	150						Amps
Maximum Instantaneous Forward Voltage at 8.0A DC		V_F	1.0				1.35		Volts
Maximum DC Reverse Current at Rated DC Blocking Voltage	@T_C = 25°C	I_R	10						uAmps
	@T_C = 100°C		500						
Maximum Reverse Recovery Time (Note 1)		trr	35				50		nSec
Typical Thermal Resistance		RθJC	3						°C/W
Typical Junction Capacitance (Note 2)		C_J	50				30		pF
Operating and Storage Temperature Range		T_J, T_{STG}	-65 to + 150						°C

NOTES : 1. Test Conditions: IF = 0.5A, IR = 1.0A, IRR = 0.25A
2. Measured at 1 MHz and applied reverse voltage of 4.0 volts.
3. Suffix "A" =Common Anode.

NEXT BACK EXIT

FIG. 1 - TEST CIRCUIT DIAGRAM AND REVERSE RECOVERY TIME CHARACTERISTIC

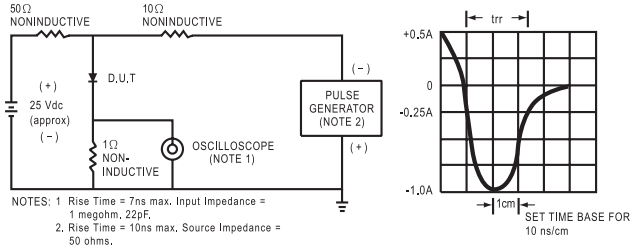

NOTES: 1. Rise Time = 7ns max. Input Impedance = 1 megohm, 22pF.
2. Rise Time = 10ns max. Source Impedance = 50 ohms.

FIG. 2 - TYPICAL FORWARD CURRENT DERATING CURVE

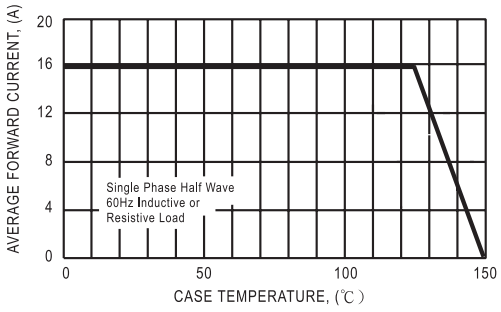

FIG. 3 - TYPICAL REVERSE CHARACTERISTICS

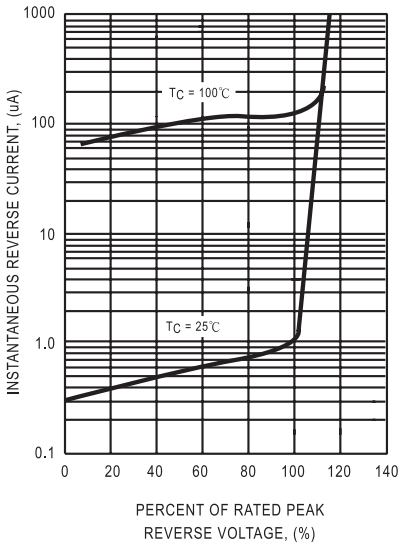

FIG. 4 - MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

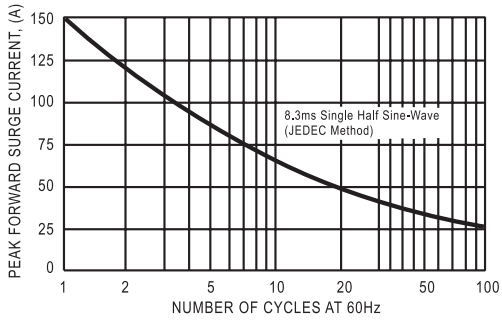

FIG. 5 - TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

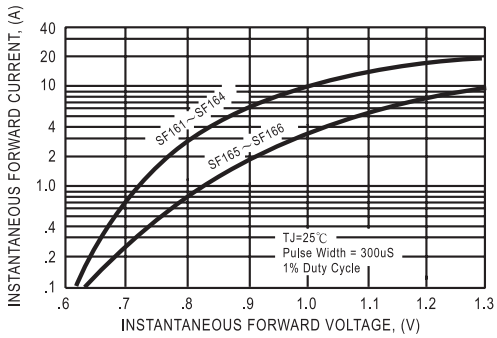

FIG. 6 - TYPICAL JUNCTION CAPACITANCE

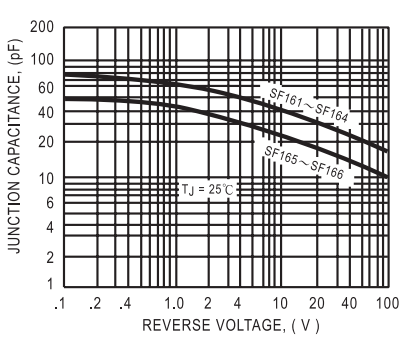

WWW.ALLDATASHEET.COM

Copyright © Each Manufacturing Company.

All Datasheets cannot be modified without permission.

This datasheet has been download from :

www.AllDataSheet.com

100% Free DataSheet Search Site.

Free Download.

No Register.

Fast Search System.

www.AllDataSheet.com